




Compact, accurate and reliable

Saral is compact single phase direct connected intelligent credit meter for domestic, small commercial metering applications including net metering. Its enhanced revenue protection features coupled with inter-operable communication protocol makes it an ideal choice for distribution companies. The meter offers an accurate and reliable metering solution for measurement of electrical energy in a single phase 2-wire network and ensures revenue assurance.



Metrology

- Saral sets a benchmark for metrology in its class and exhibits stable metrological characteristics in diverse field conditions

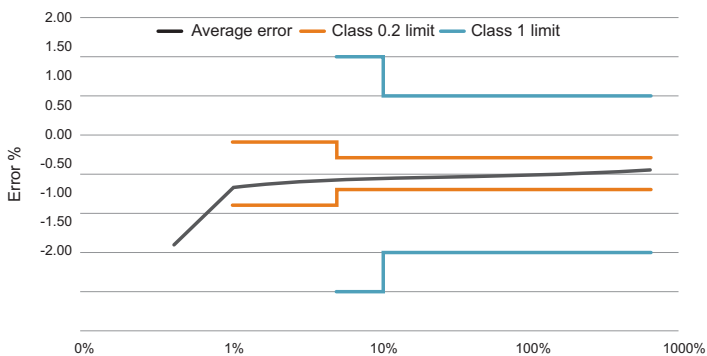

Revenue protection

- Ensures revenue protection even in case of wrong connections such as reversal, interchange of earth and neutral, partial earthing
- Immune to abnormal magnetic interference and electric discharge
- Extensive forensic information for detection and analysis of tamper

End to end data security

- Security against manipulating meter data
- Authenticated billing and metering data with time stamp

Highlights

- Meter reading in absence of mains
- Integrated base and cover
- Current and temperature profile to help analyse loose connections, attempts to burn
- Walkby meter reading over BLE (optional)

Cost of ownership

- Robust power supply designed to withstand harsh electrical and environmental conditions
- Designed to serve a long life in the field
- Meter is sealed for life
- Burden is low

Simplicity

- Smallest footprint in its class
- Compact and light weight
- User friendly display
- Intuitive display actuator without an opening

Benefits

- Advanced anti tamper capabilities—prevention, detection and deterrence
- Quality of supply information
- Peak and off-peak tariff management
- Stringent ingress protection/outdoor
- Low cost of ownership



Technical specifications

Electrical

Connection type	Direct connected
Wiring configuration	Single phase, two wire
Voltage range	230/240 V (P-N)
Current range	5-30A, 10-60A, 10-100A
Accuracy class	1.0
Mains frequency	50 / 60 Hz
Burden	
Voltage circuit:	< 0.5W and 1 VA
Current circuit:	< 0.1 VA

Compliance

Standards	IS 13779, IEC 62052-11, IEC 62053-21, IS 15959
Meter constant	6400 imp/kWh, 3200 imp/kWh, 1280 imp/kWh

Mechanical

Dimensions (W x H x D)	95 x 130 x 60mm (approx.)
Weight	0.3 kg (approx.)
Enclosure	Engineering plastic

Environmental

Ingress protection	IP 54
Surge withstand	10 kV
Humidity	95% non-condensing
Temperature	-20 °C to +60°C (operating), -25 °C to +70 °C (storage)

Measurement

Energy types	Active and apparent
Energy registration	Forwarded, import and export

Tariff

	Up to 8 rate registers
	Up to 8 time zones
	Seasons, weekdays, and holidays
Maximum demand	Configurable in 6 rate registers

Data storage

Midnight energy	35 days for 2 parameters
Load survey	More than 150 days (30min. IP) upto 5 parameters
Events	Up to 300 events, compartment wise
History	12 billing periods

Communication

IEC 62056-21 physical port for local communication
 Optional BLE (Bluetooth Low Energy) with mobile app support or
 RS 232 port over micro USB for remote communication

Australia

sales_australia@securemeters.com
 www.securemeters.com/au

Europe

sales_europe@securemeters.com
 www.securemeters.com/eu

India, SE Asia, Africa

sales_india@securemeters.com
 www.securemeters.com/in

UAE

sales_middleeast@securemeters.com
 www.securemeters.com/me

UK

sales_uk@securemeters.com
 www.securemeters.com/uk